
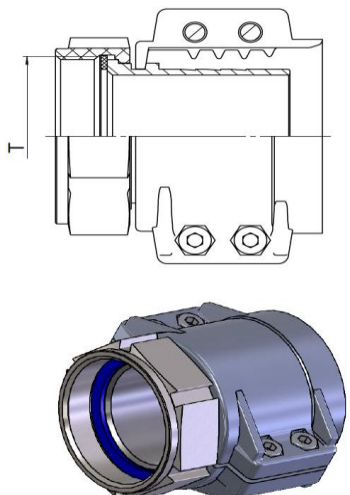



内螺纹软管接头 Female Hose Fittings

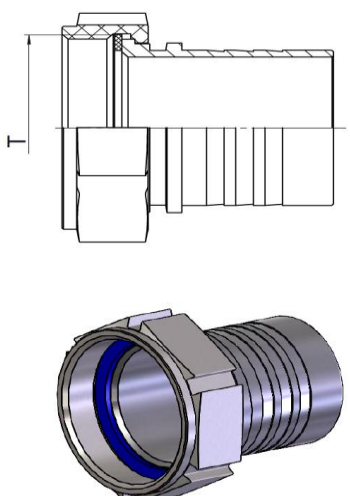

上海齐宇机电设备有限公司
Shanghai Qiyu Mechatronic Equipment Co., Ltd.

产品编号 Part Number Type	螺纹规格 Thread Size T	软管规格 Hose Size			重量 Weight ≈Kg	符合EN 14420-5标准的内螺纹软管接头。 Female hose fittings acc. to EN 14420-5
		ID mm	ID in.	OD mm		
FG08-25×6	G1	25	1"	36-39	0.2	<p>带铝合金安全卡箍的内螺纹软管接头。 Female hose fittings with aluminium safety clamp.</p> <p>不锈钢软管尾芯，镀镍锻造黄铜活接螺母，配有预装式内置聚氨酯密封圈，适用于航空加油工况。</p> <p>Stainless steel hose tail, nickel-plated forged brass union nut with captive internal polyurethane seal, suitable for aircraft refuelling service.</p> 
FG10-32×6	G1¼	32	1¼"	43-46	0.3	
FG10-25×6	G1¼	25	1¼"	36-39	0.3	
FG12-38×6.5	G1½"	38	1½"	50-53	0.5	
FG12-32×6	G1½"	32	1¼"	43-46	0.4	
FG12-25×6	G1½"	25	1"	36-39	0.3	
FG16-50×8	G2	50	2"	63-67	0.9	
FG16-38×6.5	G2	38	1½"	50-53	0.7	
FG16-32×6	G2	32	1¼"	43-46	0.5	
FG20-63×8	G2½"	63	2½"	78-82	1.2	
FG20-50×8	G2½"	50	2"	63-67	0.7	
FG24-75×8	G3"	75	3"	89-94	1.6	
FG24-63×8	G3"	63	2½"	78-82	1.6	
FG32-100×8	G4"	100	4"	114-119	3.6	

FG08-25	G1	25	1"		0.1	<p>不带铝合金安全卡箍的内螺纹软管接头。 Female hose fittings without aluminium safety clamp.</p> <p>不锈钢软管尾芯，镀镍锻造黄铜活接螺母，配有预装式内置聚氨酯密封圈，适用于航空加油工况。</p> <p>Stainless steel hose tail, nickel-plated forged brass union nut with captive internal polyurethane seal, suitable for aircraft refuelling service.</p> 
FG10-32	G1¼	32	1¼"		0.2	
FG10-25	G1¼	25	1¼"		0.2	
FG12-38	G1½"	38	1½"		0.3	
FG12-32	G1½"	32	1¼"		0.3	
FG12-25	G1½"	25	1"		0.2	
FG16-50	G2	50	2"		0.6	
FG16-38	G2	38	1½"		0.5	
FG16-32	G2	32	1¼"		0.4	
FG20-63	G2½"	63	2½"		0.8	
FG20-50	G2½"	50	2"		0.4	
FG24-75	G3"	75	3"		1.1	
FG24-63	G3"	63	2½"		1.1	
FG32-100	G4"	100	4"		2.5	

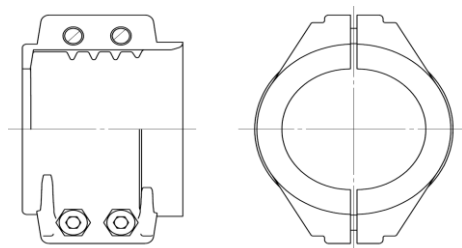产品编号 Part Number Type	螺栓规格 Bolt Size Metric Thread	软管规格 Hose Size			重量 Weight ≈Kg	符合EN 14420-3标准的安全卡箍。 Safety clamp acc. to EN 14420-3
		ID mm	ID in.	OD mm		
SC25×6	4-M6×20	25	1"	36-39	0.14	<p>带螺栓螺母的铝合金安全卡箍 Aluminium safety clamp with bolts & nuts</p> 
SC32×6	4-M6×20	32	1¼"	43-46	0.15	
SC38×6.5	4-M6×20	38	1½"	50-53	0.16	
SC50×8	4-M8×25	50	2"	63-67	0.27	
SC63×8	4-M8×25	63	2½"	78-82	0.43	
SC75×8	4-M8×25	75	3"	89-94	0.49	
SC100×8	4-M10×40	100	4"	114-119	1.09	
辅助螺栓 Auxiliary bolts	2-M6×40	用于安全卡箍装配 for safety clamp assembly				
	2-M8×60					
	2-M10×70					